


ISUZU 6BG1TC

191 Horsepower
Industrial Diesel

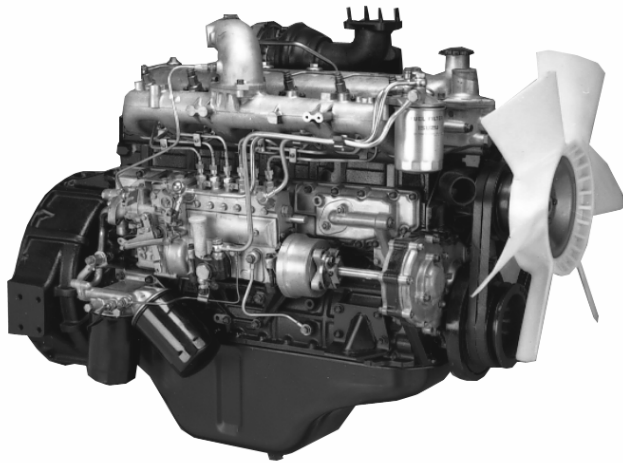

MAIN SPECIFICATIONS

Type	6-Cylinder, 4 Cycle, Water Cooled, OHV, In- Line, Direct Injection, Turbocharged, Charge Air Cooled
Bore & Stroke	4.13 x 4.92 in. (105mm x 125mm)
Engine Displacement	6.5 L
Compression Ratio	17.5:1
Dry Weight	1082 lbs. (491 kg)
Dimensions (L x W x H)	47.3 x 27.3 x 37.4 in. (1200.5 x 693.5 x 949.0mm)
Coolant Capacity	12.7 qt. (12.0 L)
Lube Oil Capacity	22.7 qt. (21.5 L) (less filter)

MAIN FEATURES


Alternator	12V – 60A
Voltage Regulator	Internal
Starter	12V – 2.5kW
Exhaust Outlet	Center Upward
Air Inlet	Center Upward
Flywheel Housing	SAE #3 Type
Flywheel	SAE Type for 11.5” Over Center Clutch (w/metric threads)
Oil Pan	35° Inclination All Directions
Fan	23.6 in. (600mm) Suction

INDUSTRIAL RATING*

Rated Output	191 BHP @ 2200 RPM
Max Torque	500 lb. ft. @ 1800 RPM

*SAE J1995 Gross BHP

Specifications subject to change without notice.

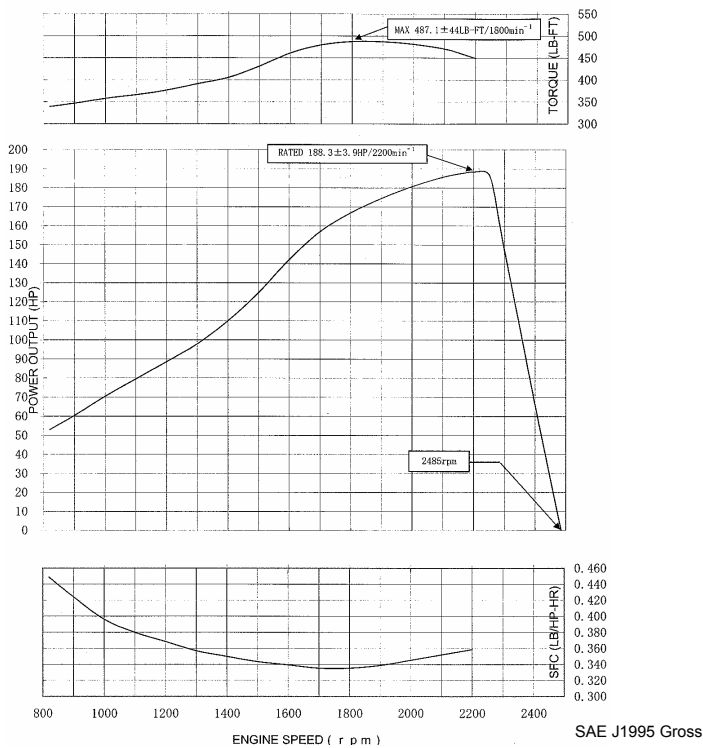

ISUZU MOTORS AMERICA, INC.
PowerTrain Division

ISUZU
DIESEL

46401 Commerce Center Drive • Plymouth, MI 48170
PHONE: 734.582.9470 • FAX: 734.455.7581
www.isuzuengines.com