

ISUZU 6SD1TC

306 Horsepower
Industrial Diesel



MAIN SPECIFICATIONS

Type	6-Cylinder, 4 Cycle, Water Cooled, OHC, Vertical In-Line, Direct Injection, Turbocharged, Charge Air Cooled
Bore & Stroke	4.72 x 5.70 in. (120mm x 145mm)
Engine Displacement	9.8 L
Compression Ratio	17.7:1
Dry Weight	1497 lb. (679 kg)
Dimensions (L x W x H)	54.4 x 39.3 x 45.6 in. (1382 x 999 x 1158mm)
Coolant Capacity	20.3 qt. (19.0 L)
Lube Oil Capacity	35.2 qt. (33.0 L) (less filter)

MAIN FEATURES


Alternator	24V – 50A
Voltage Regulator	Internal
Starter	24V – 5.5kW
Exhaust Outlet	Forward (Turbo Outlet)
Air Inlet	Rearward (Turbo Inlet)
Flywheel Housing	SAE #2 Type
Flywheel	SAE Type for 11.5"
Oil Pan	35° Inclination All Directions

INDUSTRIAL RATING*

Rated Output	306 BHP @ 2000 RPM
Max Torque	868 lb. ft. @ 1600 RPM

*SAE J1995 Gross BHP

Specifications subject to change without notice.

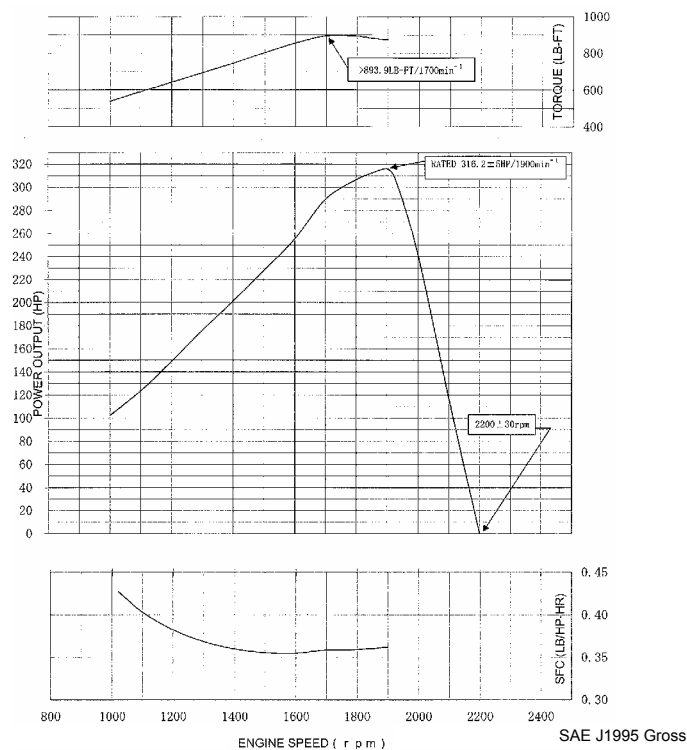

ISUZU MOTORS AMERICA, INC. PowerTrain Division

ISUZU
DIESEL

46401 Commerce Center Drive • Plymouth, MI 48170
PHONE: 734.582.9470 • FAX: 734.455.7581
www.isuzuengines.com