


20L

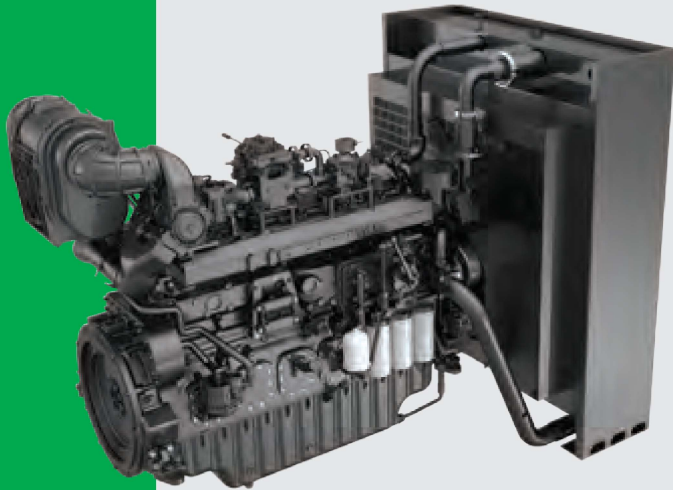


| | |
|-----------------------|---|
| Cylinders | I-6 |
| Induction System | Turbocharged & Air-to-Air Charge Cooled |
| Combustion System | Spark-Ignited |
| Cooling System | Water-Cooled |
| Displacement | cid (19,600 cc) |
| Compression Ratio | 10.5:1 |
| Bore & Stroke | 5.90 in x 7.30 in (150 mm x 185 mm) |
| Direction of Rotation | Counter-Clockwise Viewed on Flywheel |
| Dry Weight | 4,648 lbs (2110 kg) |

50Hz (1500RPM)

| Application | Fuel | kWe | kWm | bHp |
|-------------|------|-----|-----|-----|
| Standby | NG | 375 | 425 | 536 |
| Standby | LP | 250 | 300 | 536 |
| Prime | NG | 350 | 400 | 536 |
| Prime | LP | 250 | 300 | 536 |

60Hz (1800RPM)

| Application | Fuel | kWe | kWm | bHp |
|-------------|------|-----|-----|-----|
| Standby | NG | 450 | 510 | 603 |
| Standby | LP | 250 | 310 | 416 |
| Prime | NG | 400 | 450 | 603 |
| Prime | LP | 250 | 310 | 416 |

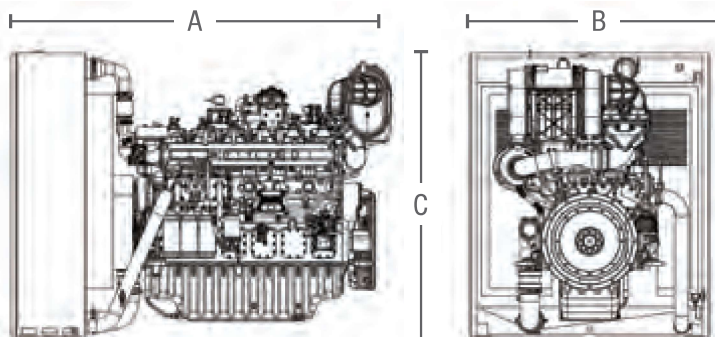

PRODUCT DIMENSIONS

A – 99.8 in (2,536 mm)

B – 62.7 in (1,592 mm)

C – 74.8 in (1,900 mm)